

FD-1001M_J-C

MODULAR CUBELET ICE MACHINE

SLIM-LINE DISPENSER SERIES

Item # _____

Project: _____

Qty: _____

*AutoCad available on KCL

FD-1001M_J-C

10/14

Item #I3242

CUBELET DIMENSIONS

W x D x H

FD-1001M_J-C
22 x 24 x 26



B-300



B-500



FD-1001MAJ-C

Air-Cooled

Shown on an optional
Lancer 22" Dispenser

FD-1001MRJ-C

Remote Air-Cooled

- Up to 940 lbs. of ice production per 24 hours

- Durable stainless steel exterior

- Protected by H-GUARD Plus Antimicrobial Agent 

- Advanced CleanCycle24™ Design 


- Produces ideal chewable ice

- Dispenser ready / infrared bin control

- R-404A Refrigerant

* The FD-1001MAJ-C is ENERGY STAR qualified.

*CUBELET DIMENSIONS



*approximate size, image not to scale



ISO 9001-ISO 14001



AIBI CERTIFIED
www.aibiinc.org



NSF



UL CERTIFIED
SAI10203

Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

Three Year - Parts & Labor on entire machine.

Five Year - Parts on compressor, air-cooled condenser coil.



Hoshizaki

FD-100IM_J-C CUBELET ICE MACHINE SLIM-LINE DISPENSER SERIES

DIMENSIONS W x D x H

FD-100IM_J-C
22 x 24 x 26

- Air-cooled
- Remote Air-cooled

AIR-COOLED

Water Temp° F.	50°	70°	90°	
Air Temp° F.	70°	940	900	861
80°	823	787	752	
90°	719	677	657	

REMOTE AIR-COOLED

Water Temp° F.	50°	70°	90°	
Air Temp° F.	70°	930	895	857
80°	820	785	752	
90°	720	683	660	

UTILITY CONSUMPTION

Model Number	KWH per 100 LBS.		Potable Water Gal. per 100 lbs.	
	90/70	70/50	90/70	70/50
FD-1001MAJ-C	4.8	3.4	12.0	12.0
FD-1001MRJ-C	5.1	3.6	12.0	12.0

SPECIFICATIONS

Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
FD-1001MAJ-C	Air-Cooled	15.2	20	210 lbs.
FD-1001MRJ-C	Remote Air-Cooled	15.7	20	210 lbs.

STORAGE BINS

Model Number	Application Capacity	ARI-Rated Capacity
B-300	300 lbs.	260 lbs.
B-500	500 lbs.	360 lbs.
BD-300	350 lbs.	260 lbs.
BD-500	500 lbs.	360 lbs.


ELECTRICAL & PLUMBING/FD-100IM_J-C

- 115V/60/1
- Ice maker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Ice maker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent




© HOSHIZAKI AMERICA, INC.


618 Hwy. 74 S., Peachtree City, GA 30269

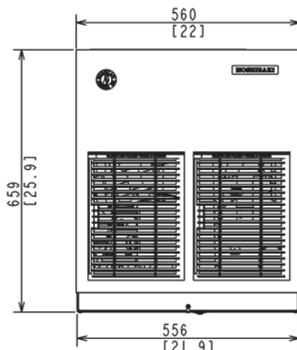


FRONT VIEW
(Air)

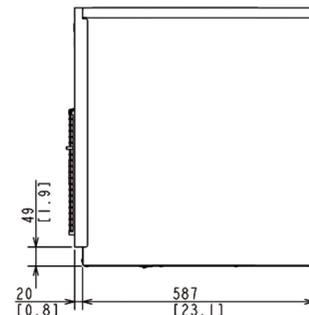


SIDE VIEW

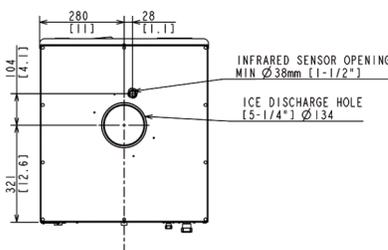

ICE DROP ZONE

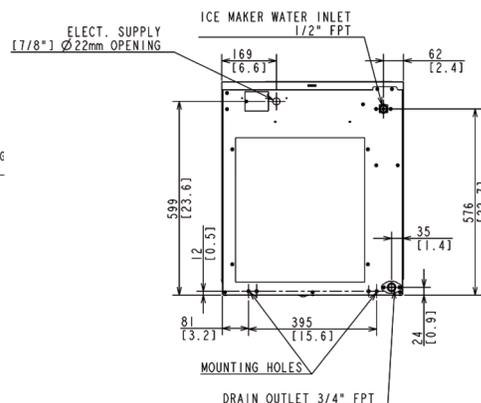


AIR-COOLED UNIT

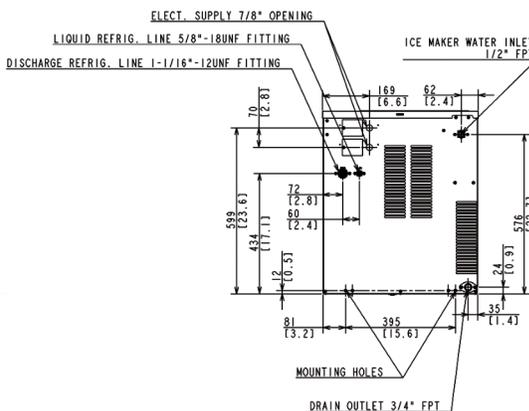


REMOTE AIR-COOLED UNIT

URC-5F Remote Condenser (Sold Separately)
Voltage supply for the URC Remote Condenser is supplied from the Ice Maker. No additional circuit is required.

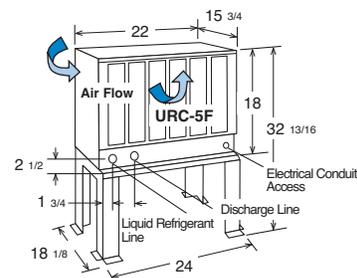

Pre-Charged Tubing Kits

(Sold Separately)
20' R404-2046-2
35' R404-3546-2



OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 104 - 127V

OPERATING LIMITS/URC-5F

- Ambient Temp Range -20°F - +122°F
- Voltage Range 104 - 127V

SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filter. (Air-Cooled model only)

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.

