

# KM-901M\_H-P

## MODULAR CRESCENT CUBER

### TAMPER PROOF MODEL

Item # \_\_\_\_\_

Project: \_\_\_\_\_

Qty: \_\_\_\_\_

\*AutoCad available on KCL

KM-901M\_H-P

5/14

Item #13319

#### CUBER DIMENSIONS

W x D x H

**KM-901M\_H-P**  
30 x 27<sup>3/8</sup> x 37<sup>7/16</sup>



Exterior Fasteners are  
Tamper Proof Torx Pin Screws

#### KM-901MAH-P

Air-Cooled


#### KM-901MWH-P

Water-Cooled






Shown on standard bin for placement only.

#### KM CUBE DIMENSIONS



\*\*approximate size in inches, image not to scale

- Up to 928 lbs. of ice production per 24 hours
- Durable stainless steel exterior
- Individual crescent cube
- Protected by H-GUARD Plus Antimicrobial Agent 
- CycleSaver® Design 
- EverCheck® alert system 
- Stainless steel evaporator
- Removable air filters located under front panel (Air-cooled model only)
- R-404A Refrigerant



ISO 9001:2015

#### Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

**Three Year** - Parts & Labor on entire machine.

**Five Year** - Parts & Labor on: Evaporator.

**Five Year** - Parts on: Compressor, air-cooled condenser coil.



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

# KM-90IM\_H-P MODULAR CRESCENT CUBER

**DIMENSIONS**  
W x D x H  
**KM-90IM\_H-P**  
30 x 27<sup>3/8</sup> x 37<sup>7/16</sup>

- Air-cooled
- Water-cooled

## AIR-COOLED

Water Temp ° F.	50°	70°	90°
Air Temp ° F.			
70°	920	889	841
80°	896	847	797
90°	889	813	762

## WATER-COOLED


Water Temp ° F.	50°	70°	90°
Air Temp ° F.			
70°	928	909	857
80°	914	885	817
90°	909	864	802

## UTILITY CONSUMPTION


Model Number	Ice Production Per Cycle		KWH per 100 LBS.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.
	Lbs.	Cubes	90/70	90/70	90/70
KM-901MAH-P	14.2	720	5.1	16.0	N/A
KM-901MWH-P	13.7	720	4.5	20.8	128

## SPECIFICATIONS


Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
KM-901MAH-P	Air-Cooled	11.4	20	256 lbs.
KM-901MWH-P	Water-Cooled	8.7	15	249 lbs.




FRONT VIEW




SIDE VIEW



ICE DROP ZONE

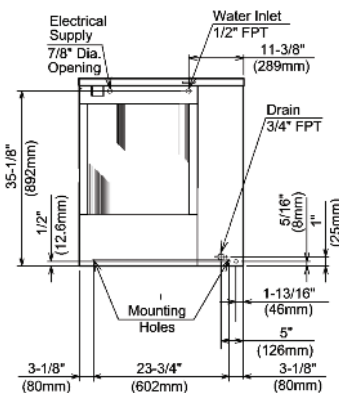

AIR-COOLED UNIT

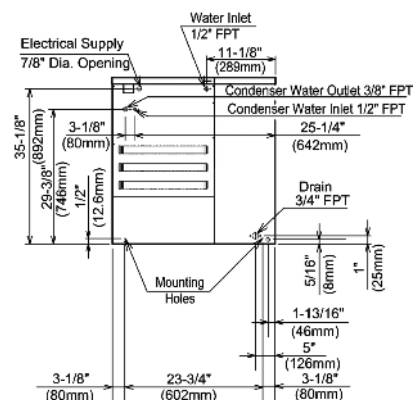

WATER-COOLED UNIT

## ELECTRICAL & PLUMBING/KM-90IM\_H-P

- 208-230V/60/1
- 20 amp Max Fuse/HACR Breaker Size - Air-cooled units
- 15 amp Max Fuse/HACR Breaker Size - Water-cooled unit
- 1/2" OD copper or equivalent independent potable water supply with 3/8" nominal ID minimum
- 3/4" FPT independent drain connection



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

## OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 187 - 253V

## SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filters under front panel (Air-cooled model only)
- Exterior fasteners are tamper proof torx pin screws.



TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.